



外置刻录机 External Burner

使用说明
User Manual

感谢您选择ORICO!

在您使用本产品前,请仔细阅读这一份使用说明书!

产品清单

产品本体.....	1PCS
数据线.....	1PCS
电源线.....	1PCS
使用说明书.....	1PCS

产品简介

本产品是一款支持刻录 DVD/CD 的便携式移动外置光驱,可以解决电脑光驱读取速率慢,电脑无光驱或电脑内置光驱损坏而无法读盘的问题。产品具备空盘刻录视频、音频文件等功能,是您办公,居家,娱乐的好助手。

规格参数

详情见2-3页

名称	外置刻录机	USB 3.0外置刻录机	USB 3.0多功能外置刻录机
型号	ORU2-01	ORU3-01 ORU3-02	ORHU3-01 ORHU3-02
尺寸	139×145×18mm	148×145×15.4mm	148×145×18mm
材质	ABS	ABS	ABS
输入	USB-B 2.0×1 DC 5V×1	Micro USB 3.0×1 DC 5V×1	Micro USB 3.0×1 5V Micro USB×1
输出	/	/	USB-A 3.0×2 TF(microSD)×1 SD×1
读取速度	CD-ROM Read: 24X DVD-ROM Read: 8X		
刻录速度	CD-R: 24X DVD±R: 8X DVD±R DL: 6X	CD-RW: 16X DVD±RW: 6X DVD-RAM: 5X	
支持读取类型	DVD ROM (single layer), DVD ROM (dual layer), DVD+R/DVD-R, DVD+R DL/DVD-R DL, DVD+RW/DVD-RW, DVD RAM, CD ROM/ finalized CD RW, Data/CD-DAE, Video CD, finalized CD RW. Unfinalized CD-R/RW		
支持刻录类型	CD-R, CD-RW, DVD-R, DVD-RW		
支持刻录模式	For CD-R/RW DVD-R/DVD-RW 1. Disc At Once (DAO) 2. Session At Once (SAO) 3. Track At Once (TAO) 4. Variable Packet Write 5. Fixed Packet Writ		
支持系统	Windows XP / 2003 / Vista / 7 / 8.1 / 10, Linux, Mac OS		
产品供电	5V --- 1.5A		


USB 3.0蓝光外置刻录机	USB 3.0蓝光100GB外置刻录机	
BRU3-01 BRU3-02	BRGU3-01 BRGU3-02	
148×145×15.4mm	148×145×15.4mm	
ABS	ABS	
Micro USB 3.0×1 DC 5V×1	Micro USB 3.0×1 DC 5V×1	
/	/	
CD-ROM Read: 24X DVD-ROM Read: 8X BD-ROM Read: 6X	BD-ROM: 6X DVD-R: 8X DVD-RW: 6X DVD+R: 8X DVD+RW: 6X CD-RW: 16X CD-ROM: 24X	
CD-R: 24X DVD±R: 8X DVD±R DL: 6X BD-R TL/QL 4X BD-RE SL/DL2X	CD-RW: 16X DVD±RW: 6X DVD-RAM 5X BD-R SL/DL6X BD-RE TL2X	BD-R: 4X DVD-R: 4X DVD-RW: 4X DVD+R: 8X DVD+RW: 4X DVD+DL (D9): 4X DVD-DL: 4X CD-R: 24X CD-RW: 16X
DVD ROM (single layer), DVD ROM (dual layer), DVD+R/DVD-R, DVD+R DL/DVD-R DL, DVD+RW/DVD-RW, DVD RAM, CD ROM/ finalized CD RW, Data/CD-DAE, Video CD, finalized CD RW. Unfinalized CD-R/RW, BD-ROM, BD-R TL/QL, BD-R SL/DL, BD-RE SL/DL, BD-RE TL		
CD-R, CD-RW, DVD-R, DVD-RW, BD-R TL/QL, BD-R SL/DL, BD-ROM, BD-RE SL/DL, BD-RE TL		
For CD-R/RW DVD-R/DVD-RW BD-R TL/QL, BD-R SL/DL, BD-RE SL/DL, BD-RE TL disc 1. Disc At Once(DAO) 2. Session At Once (SAO) 3. Track At Once(TAO) 4. Variable Packet Write 5. Fixed Packet Writ		
Windows XP / 2003 / Vista / 7 / 8.1 / 10, Linux, Mac OS		
5V --- 1.5A		

产品特点


1. 即插即用，稳定识别，无需驱动。
2. 采用进口主控芯片，低噪静音刻录。
3. 支持高速刻录与读取，具备纠错功能，电脑无光驱或电脑内置光驱损坏而无法读盘的问题。
4. 兼容多平台操作系统，安全稳定运行。

产品图示


ORU2-01




ORU3-01

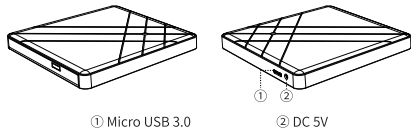


ORHU3-01

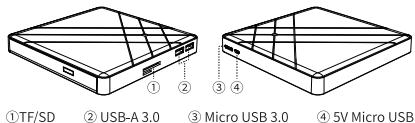


BRU3-01 / BRGU3-01

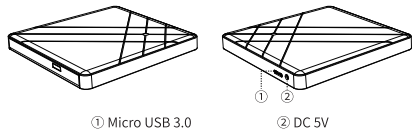


ORU3-02

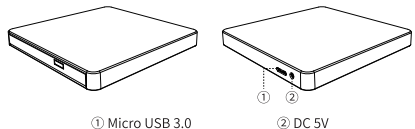

ORHU3-02

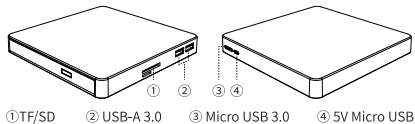

BRU3-02 / BRGU3-02




① Micro USB 3.0

② DC 5V

使用方法

Windows 7下的驱动安装说明


1. 将外置光驱的数据线连接到电脑USB接口，电脑显示器右下角有提示，系统会自动安装程序，等待安装完成。




ORU2-01

ORHU3-01

ORHU3-02



- ORU3-01
- ORU3-02
- BRU3-01
- BRGU3-01
- BRU3-02
- BRGU3-02



①②单独连接电脑(数据传输); ①②同时连接电脑(数据传输+额外供电), 对于大多数计算机, 仅单独连接电脑即可满足工作要求。如果您计算机上的USB 总线无法提供足够的电源来运行刻录, 请将③ USB电源线连接到计算机或DC 5V/1.5A电源适配器(需另外单独购买), 请避免使用功率超过1.5A的适配器, 否则可能会损坏设备。

2. 点击桌面上的“计算机”, 在“有可移动的存储设备”中可找到光驱。



3. 双击光驱盘, 或右键单击并选择“弹出”, 会跳出装入光盘提示。



4. 当光驱弹出，装入光盘后，外置光驱的指示灯亮起，说明正常工作。
5. 刻录功能，需要自行安装刻录软件进行刻录。

常见问题

外置光驱无法使用怎么办？

1. 请确保正确安装，安装时请暂时关闭杀毒软件。
2. 尝试更换电脑其他USB接口。
3. 避免使用USB延长线和HUB连接本产品，以免导致电脑无法识别。
4. 无法读盘：检查光盘是否正确放入，清洁光盘，更换其它光盘或拿新盘测试。
5. 能读出光盘内容，不能播放，请更换播放软件。
6. 读碟出现异响，声音大。
 - ① 更换几张光盘试试
 - ② 光盘没有卡好
 - ③ 光盘质量差，薄厚不同也会影响到声音大小

注意事项

1. 产品内部有激光光源可能对眼睛有害，请不要直视。
2. 请将机器平稳的放在桌面上，切勿放在不稳定的物品上。
3. 请勿将机器放在易受挤压的地方，以保证机器正常使用。
4. 请勿撞击、扔掷、针刺本产品，并避免跌落、挤压、弯曲产品。
5. 请勿在潮湿环境中使用或储存本产品，并避免本产品被液体浸湿或冲洗。
6. 请勿在高温、高粉尘环境中使用产品，并远离火源。
7. 请勿将本产品放置在日光中曝晒。
8. 请勿将本产品置于有腐蚀性物品的环境，严禁使用其他化学溶液清洗本产品。
9. 请勿将产品及附件放置于具有强大电磁场的器具中，以及远离磁性设备。
10. 请将产品及附件放在儿童触摸不到的地方，请勿让儿童在无人监管的情况下使用产品。
11. 请勿擅自拆卸和维修产品及附件，只有授权机构才可维修本产品。

12. 如需要配备电源适配器的产品，请使用本公司指定的电源适配器。
13. 本产品使用过程中如有任何问题，可随时与您的经销商或ORICO客户服务中心联系。

保修说明

ORICO 产品的售后服务严格依据《中华人民共和国消费者权益法》、《中华人民共和国产品质量法》，实行售后三包服务，服务内容如下：

1. 自签收之日起7日内，产品出现性能故障并由ORICO客户服务中心鉴定之后，可享受退货、换货或免费维修服务。
2. 自签收起8-15日内，产品出现性能故障并由ORICO客户服务中心鉴定之后，可享受换货或免费维修服务。
3. 自签收之日起12个月内，产品出现性能故障并由ORICO客户服务中心鉴定之后，可享受免费维修服务。

保修限制条款

深圳市元创时代科技有限公司保修条款不适用于以下情况：

1. 超过保修条款期限。
2. 未经授权拆解、改动或维修过的产品，以及碰撞、进液、摔坏等人为损坏。
3. 水灾、火灾、雷击、地震等不可抗力造成的损坏。

4. 与本使用说明不一致的错误操作。
5. 产品或包装盒条码与实物不符，以及被涂改、撕毁。
6. 未经授权使用非原装配件造成的损坏。
7. 无有效的购买凭证。

声明

深圳市元创时代科技有限公司，版权所有
感谢您购买ORICO产品，为了更好的使用本产品的所有功能，请您在使用产品之前仔细阅读本使用说明介绍的产品功能、使用说明以及注意事项。

ORICO®为深圳市元创时代科技有限公司注册商标。

本使用说明中提及的其他所有产品名称、商标、服务名称和公司名称，由其各自的所有者拥有。

本使用说明所提及的信息仅供参考，深圳市元创时代科技有限公司保留随时修改本使用说明中任何信息的权利，无需提前通知。除非有特殊约定，本使用说明仅作为使用指导，本使用说明中的所有陈述、信息等均不构成任何形式的担保。深圳市元创时代科技有限公司不对因使用本使用说明相关内容及本使用说明描述的产品而产生的任何特殊的、附带的、间接的、继发性的损害进行赔偿，也不对任何利润、数据、商誉或预期节约的损失进行赔偿。在相关法律允许的范围内，在任何情况下，深圳市元创时代科技有限公司对您因为使用本使用说明描述的产品而遭受的损失的最大责任（除在涉及人身伤害的情况下根据适用的法律规定的损害赔偿外）以您购买本产品所支付的价款为限。

Thanks for choosing ORICO!

Please read this user's manual carefully before using it!

What is in the box

The Product.....1PCS
Data Cable.....1PCS
Power Cord.....1PCS
User Manual.....1PCS

Product Introduction

This product is a portable USB external drive which support to burning DVD/CD, able to solve the problem of slow reading of computer optical drive, or unable to read the disk due to no optical drive. The product has functions such as burning video and audio files on an empty disk, and is a good assistant for your office, home, and entertainment.

Specifications

See page 2-3 for details

Name	External Burner	USB 3.0 External Burner	USB3.0 Multi-function External Burner
Model	ORU2-01	ORU3-01 ORU3-02	ORHU3-01 ORHU3-02
Dimensions	139×145×18mm	148×145×15.4mm	148×145×18mm
Material	ABS	ABS	ABS
Input	USB-B 2.0×1 DC 5V×1	Micro USB 3.0×1 DC 5V×1	Micro USB 3.0×1 5V Micro USB×1
Output	/	/	USB-A 3.0×2 TF(microSD)×1 SD×1
Reading speed	CD-ROM Read: 24X DVD-ROM Read: 8X		
Burning speed	CD-R: 24X DVD±R: 8X DVD±R DL: 6X	CD-RW: 16X DVD±RW: 6X DVD-RAM: 5X	
Read types	DVD ROM (single layer), DVD ROM (dual layer), DVD+R/DVD-R, DVD+R DL/DVD-R DL, DVD+RW/DVD-RW, DVD RAM, CD ROM/ finalized CD RW, Data/CD-DAE, Video CD, finalized CD RW. Unfinalized CD-R/RW		
Burn types	CD-R, CD-RW, DVD-R, DVD-RW		
Burning mode	For CD-R/RW DVD-R/DVD-RW 1. Disc At Once (DAO) 2. Session At Once (SAO) 3. Track At Once (TAO) 4. Variable Packet Write 5. Fixed Packet Writ		
Supported System	Windows XP / 2003 / Vista / 7 / 8.1 / 10, Linux, Mac OS		
Power Supply	5V --- 1.5A		


USB 3.0 Blu-ray External Burner	USB 3.0 Blu-ray 100GB External Burner
BRU3-01 BRU3-02	BRGU3-01 BRGU3-02
148×145×15.4mm	148×145×15.4mm
ABS	ABS
Micro USB 3.0×1 DC 5V×1	Micro USB 3.0×1 DC 5V×1
/	/
CD-ROM Read: 24X DVD-ROM Read: 8X BD-ROM Read: 6X	BD-ROM: 6X DVD-R: 8X DVD-RW: 6X DVD+R: 8X DVD+RW: 6X CD-RW: 16X CD-ROM: 24X
CD-R: 24X CD-RW: 16X DVD±R: 8X DVD±RW: 6X DVD±R DL: 6X DVD-RAM 5X BD-R TL/QL 4X BD-R SL/DL6X BD-RE SL/DL2X BD-RE TL2X	BD-R: 4X DVD-R: 4X DVD-RW: 4X DVD+R: 8X DVD+RW: 4X DVD+DL(D9): 4X DVD-DL: 4X CD-R: 24X CD-RW: 16X
DVD ROM (single layer), DVD ROM (dual layer), DVD+R/DVD-R, DVD+R DL/DVD-R DL, DVD+RW/DVD-RW, DVD RAM, CD ROM/ finalized CD RW, Data/CD-DAE, Video CD, finalized CD RW. Unfinalized CD-R/RW, BD-ROM, BD-R TL/QL, BD-R SL/DL, BD-RE SL/DL, BD-RE TL	
CD-R, CD-RW, DVD-R, DVD-RW, BD-R TL/QL, BD-R SL/DL, BD-ROM, BD-RE SL/DL, BD-RE TL	
For CD-R/RW DVD-R/DVD-RW BD-R TL/QL, BD-R SL/DL, BD-RE SL/DL, BD-RE TL disc 1. Disc At Once(DAO) 2. Session At Once (SAO) 3. Track At Once(TAO) 4. Variable Packet Write 5. Fixed Packet Writ	
Windows XP / 2003 / Vista / 7 / 8.1 / 10, Linux, Mac OS	
5V ---1.5A	

Product features


1. Plug and play, stable recognition, no need to drive.
2. Imported main control chip, low-noise and silent recording.
3. Support high-speed recording and reading, with error correction function, the computer has no optical drive or computer The built-in optical drive is damaged and cannot be read.
4. Compatible with multi-platform operating systems, safe and stable operation.

Illustration


ORU2-01



ORU3-01

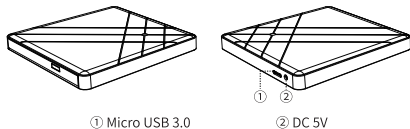


ORHU3-01



① TF/SD ② USB-A 3.0 ③ Micro USB 3.0 ④ 5V Micro USB


BRU3-02 / BRGU3-02

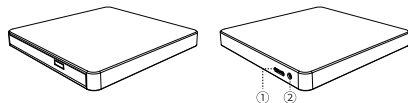

① Micro USB 3.0

② DC 5V

BRU3-01 / BRGU3-01



① Micro USB 3.0


② DC 5V

How to use

Instructions for Windows 7 Driver Installation

1. Connect the cable with external optical drive to USB port. When there is a hint on the bottom right, windows will start installing


ORU3-02

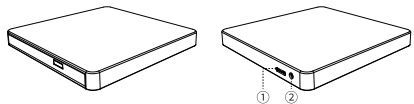

① Micro USB 3.0


② DC 5V

ORHU3-02




① TF/SD ② USB-A 3.0 ③ Micro USB 3.0 ④ 5V Micro USB


ORU2-01

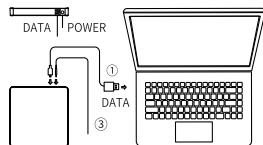

ORHU3-01
ORHU3-02



ORU3-01
ORU3-02
BRU3-01
BRGU3-01
BRU3-02
BRGU3-02

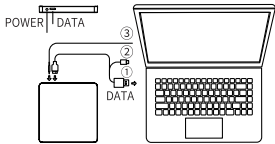


①②Connect to the computer alone (data transmission). ①②Connect to the computer at the same time (data transmission + additional power supply). For most computers, only a single connection to the computer can meet the work needs. **If the USB bus on your computer does not provide enough power to run the drive, connect ③ USB power cable to PC or a DC 5V/1.5A power adapter (separately purchase). Please avoid using an adapter with power over 1.5A that may cause damage to the device.**

2. Click "Windows", then the optical disc will be found in "Removable Storage".



3. Double click optical drive, or choose "pop-up", then windows will advise you to load optical disc.

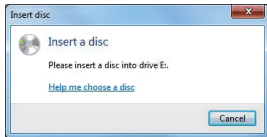

4. After installing optical disc when optical drive pops up, external optical drive lightens, which means it works well.
5. Disc burning function need to be used with burning software.

FAQ

What if external drive runs poor?

1. Please make sure install correctly, turn off anti-virus software during installation.

2. Try to replace other USB ports.
3. Avoid using USB expanded cables and HUB for connecting, in case the computer doesn't recognize it.
4. Failed reading: (a) Check whether the disc is properly placed. (b) Clean disc. (c) Replace another disc or testing with new disc.
5. If the optical disc can be read but not be played, please change the play software.
6. If there is noise when reading, please (a) Change optical discs. (b) Check the installed optical disc. (c) Check the quality of optical discs, which will influence the sound.

Attention

1. Do not look steadily for the laser source doing harm to eyes.
2. Please place the machine on the table smoothly.
3. Do not place the machine on which it squeezes easily, for its normal use.
4. Please do not hit, throw, or puncture the product, and avoid dropping, squeezing or bending.
5. Please do not use or store this product in a humid environment and avoid being wetted or rinsed with liquids.
6. Please do not use the product in a hot, high-dust environment and keep it away from fire.

7. Please do not expose this product to the sun.
8. Please do not place this product in a corrosive environment. Do not use other chemical solutions to clean the product.
9. Please do not place the product or accessories in appliances with strong electromagnetic fields and away from magnetic equipment.
10. Please keep the product and accessories away from children. Do not allow children to use the product without supervision.
11. If you need a product with a power adapter, please use the power adapter specified by our company.
12. Please do not disassemble and repair the product or accessories without the authorization of ORICO.
13. If you have any questions during the use of this product, please feel free to contact your dealer or ORICO Customer Service Center.

FCC

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Declaration

ORICO Technologies Co., Ltd., all rights reserved.

Thank you so much for purchase ORICO product. Please refer to this manual when using orico product or experienced issues. Additionally, please kindly contact ORICO customer care team if any concern.

ORICO® is registered trademark of ORICO Technologies Co., Ltd.. Any other product, trademark, service or company mentioned herein is trademark or registered trademark of the respective owners.

This manual is for reference only and it's not a guarantee.

ORICO Technologies Co., Ltd. reserve all rights of maintenance to this manual and shall not liable for any lost or damage resulting from this manual. Please kindly contact orico customer care team when any concern.

ORICO Technologies Co., Ltd shall not liable for compensation and maintenance of the following conditions.

1. Any special, incidental, indirect and secondary lost or damage.
2. Profit and revenue lost or damage.
3. Files, data, drive and device lost or damage.

Note: Compensation for lost or damage resulting from This manual or orico product shall not exceed the payment of your purchase to this product.



官方网站



Website

发行版本: 外置刻录机系列-MUG-R0

制造商: 深圳市元创时代科技有限公司

Manufactured by ORICO Technologies Co., Ltd.

售后热线/Hotline: 400-6696298

联系热线/Tel: 86-755-25196059

邮箱/E-mail: supports@orico.com.cn

官方网站: www.orico.com.cn

Official Website: www.orico.cc

公司地址: 深圳市龙岗区吉华街道甘坑社区甘李六路
12号中海信创新产业城14栋A1903-1904

Company Add: 1903-1904, 14A, Zhonghaixin
Innovation Industrial Park, no.12, Gan Lee
Sixth Road, Gankeng Community, Jihua
Street, Shenzhen, China

工厂地址: 东莞市常平镇塘角村塘角路24号元创动力产
业园C栋2楼

Factory Add: 2/F, Block C, Internet & Creativity
Industrial Park, No.24 Tangjiao Rd,
Changping Town, Dongguan, China